


POUR STOP SELECTION TABLE

| SLAB DEPTH (Inches) | OVERHANG (INCHES) | | | | | | | | | | | | |
|---------------------|-------------------|----|----|----|----|----|----|----|----|----|----|----|----|
| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 4.00 | 20 | 20 | 20 | 20 | 18 | 18 | 16 | 14 | 12 | 12 | 12 | 10 | 10 |
| 4.25 | 20 | 20 | 20 | 18 | 18 | 16 | 16 | 14 | 12 | 12 | 12 | 10 | 10 |
| 4.50 | 20 | 20 | 20 | 18 | 18 | 16 | 16 | 14 | 12 | 12 | 12 | 10 | 10 |
| 4.75 | 20 | 20 | 18 | 18 | 16 | 16 | 14 | 14 | 12 | 12 | 10 | 10 | |
| 5.00 | 20 | 20 | 18 | 18 | 16 | 16 | 14 | 14 | 12 | 12 | 10 | 10 | |
| 5.25 | 20 | 18 | 18 | 16 | 16 | 14 | 14 | 12 | 12 | 12 | 10 | 10 | |
| 5.50 | 20 | 18 | 18 | 16 | 16 | 14 | 14 | 12 | 12 | 12 | 10 | 10 | |
| 5.75 | 20 | 18 | 16 | 16 | 14 | 14 | 12 | 12 | 12 | 12 | 10 | 10 | |
| 6.00 | 18 | 18 | 16 | 16 | 14 | 14 | 12 | 12 | 12 | 10 | 10 | 10 | |
| 6.25 | 18 | 18 | 16 | 14 | 14 | 12 | 12 | 12 | 12 | 10 | 10 | 10 | |
| 6.50 | 18 | 16 | 16 | 14 | 14 | 12 | 12 | 12 | 12 | 10 | 10 | 10 | |
| 6.75 | 18 | 16 | 14 | 14 | 14 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | |
| 7.00 | 16 | 16 | 14 | 14 | 12 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | |
| 7.25 | 16 | 16 | 14 | 14 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | |
| 7.50 | 16 | 14 | 14 | 12 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | |
| 7.75 | 16 | 14 | 14 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 8.00 | 14 | 14 | 12 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 8.25 | 14 | 14 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 8.50 | 14 | 12 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 8.75 | 14 | 12 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 9.00 | 14 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 9.25 | 12 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 9.50 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 9.75 | 12 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 10.00 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 10.25 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 10.50 | 12 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 10.75 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 11.00 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 11.25 | 12 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 11.50 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 11.75 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| 12.00 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |

| TYPES | DESIGN THICKNESS |
|-------|------------------|
| 20 | 0.0358 |
| 18 | 0.0474 |
| 16 | 0.0598 |
| 14 | 0.0747 |
| 12 | 0.1046 |
| 10 | 0.1345 |

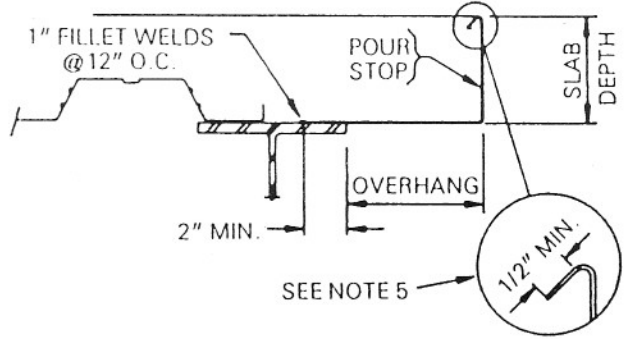

NOTES: The above Selection Table is based on following criteria:

1. Normal weight concrete (150PCF)
2. Horizontal and vertical deflection is limited to 1/4" maximum for concrete dead load.
3. Design stress is limited to 20 KSI for concrete dead load temporarily increased by one-third for the construction live load of 20 PSF.
4. Pour Stop Selection Table does not consider the effect of the performance, deflection, or rotation of the pour stop support which may include both the supporting composite deck and/or the frame.
5. Vertical leg return lip is recommended for type 16 and lighter.
6. This selection is not meant to replace the judgement of experienced Structural Engineers and shall be considered as a reference only.

MSD reserves the right to change any information in this selection without notice.