


## TYPE "F" INTERMEDIATE RIB DECK

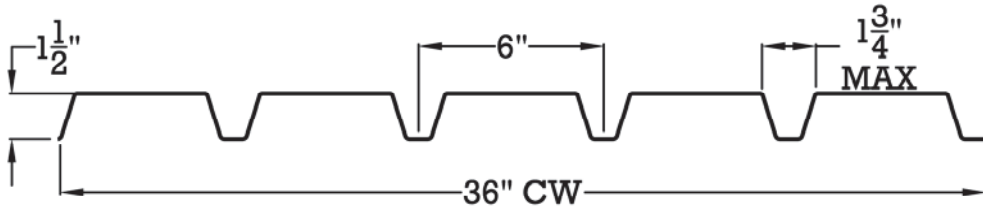

### SECTION PROPERTIES FY=33 KSI

DECK TYPE	DESIGN THICKNESS	WT PSF	WT PSF	I <sup>P</sup> IN. <sup>4</sup>	I <sup>N</sup> IN. <sup>4</sup>	S <sup>P</sup> IN. <sup>3</sup>	S <sup>N</sup> IN. <sup>3</sup>
		GALV	PNTD				
22	.0295 IN.	1.61	1.54	.130	.154	.135	.144
20	.0358 IN.	1.95	1.88	.168	.187	.169	.174
18	.0474 IN.	2.56	2.47	.240	.246	.226	.228

DECK-SPAN	DECK TYPE	DECK SUPPORT SPACING (FT.-IN.)										POUNDS PER SQUARE FOOT		
		4-0	4-6	5-0	5-6	6-0	6-6	7-0	7-6	8-0	8-6	9-0		
SIMPLE	22	109	87	70	58	49	42	35	*	*	*	*		
	20	136	107	87	72	61	51	34	39	*	*	*		
	18	184	145	118	98	82	68	56	48	41	36	*		
DOUBLE	22	120	95	77	64	54	46	40	35	*	*	*		
	20	145	115	93	77	65	55	48	41	37	*	*		
	18	190	150	122	101	85	72	62	54	48	42	36		
TRIPLE OR MORE	22	150	119	96	80	67	57	49	43	38	*	*		
	20	181	143	117	96	81	69	60	52	46	40	36		
	18	238	188	152	126	107	90	78	68	60	53	47		

LOAD TABLES AND SECTION PROPERTIES WERE GENERATED BY THE SDI. STANDARD COVER WIDTH IS 36"

1. Roof deck section properties calculated in accordance with the AISI "Specification for the design of Cold-Formed Steel Structural Members."
2. Roof decks loads computed in accordance with the SDI bending moment and deflection formulas.
3. Loads shown in tables are uniformly distributed total (dead plus) loads in pounds per square foot. Loads in shaded area are governed by the live load deflection not in excess of L/240. The dead load included is 10 psf. All other loads are governed by the allowable flexural stress limit of 20,000 psi for 33,000 psi minimum yield.

4. Span lengths are considered center-to-center spacing of supports.
5. Spans which extend beyond the heavy vertical line in the load tables exceed the "Recommended Maximum spans for Construction and Maintenance Loads" shown on page 30.
6. Where heavy construction loads or other unusual concentrated loads are anticipated during the lifetime of the deck, the specified live load must be increased to offset the effects of the abnormal concentrated loading.